



- 5 x 10/100/1000 BASE-T RJ45 Ports auto-MDI/MDI-X
- 4 x IEEE 802.3af/802.3at PoE+ Ports (Ports 1-4)
- 12-48VDC Power Input with Voltage Booster for PoE Ports
- Supports 802.3x Flow Control
- DIN Rail and Wall-Mount Installation
- Up to 120W PoE Budget (48VDC), 90W PoE Budget (24VDC), and 60W PoE Budget (12VDC)
- IP40 Aluminium Enclosure
- -40°C to +80°C Operating Temperature Range

Overview:

The PDT-NSU-7005-MP-I is an Ultra-Small Form Factor Industrial PoE Switch, supporting 5 x 10/100/1000 BASE-T RJ45 Ports, 4 of which are equipped with IEEE 802.3af/802.3at PoE+ functionality. The unit is designed for harsh industrial conditions and environments and has a wide operating input voltage range of 12-48VDC, allowing it to be used in solar or other battery powered applications. An internal voltage booster ensure that 48VDC is supplied to the 4 x 802.3at compliant PoE Ports. The unit is housed in a rugged aluminium case, and the device has a wide operating temperature range, to allow it to be used in a wide variety of applications.

Applications

- Solar Powered PoE Devices
- CCTV Installations
- Lighting Systems
- Access Control
- Remote Monitoring Stations
- Distributed IoTx Gateways



Data

Data
PoE

Data
PoE

Specifications And Availability Are Subject To Change Without Notice. Trademarks Are The Property Of Their Respective Owners.
Copyright © 2022 Parallax Digital Technologies Ltd. All Rights Reserved.



Parallax Digital Technologies Ltd
Unit 19 Endeavour Park, Baker Road
Nelson Park West, Cramlington
Northumberland, NE23 1XA



+44 (0)1670 202001




sales@parallaxdigital.co.uk

www.parallaxdigital.co.uk

Specifications

ETHERNET	Standards	IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3az Efficient Energy Ethernet IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet Plus	ELECTRICAL	Operating Voltage	12-48VDC (Terminal Block Connector)
	Forwarding and Filtering Rate	14,880pps (10Mbps) 148,800pps (100Mbps) 1,488,000pps (1000Mbps)		Power Consumption	6W without PoE
	Packet Buffer	1Mbits		Short-Circuit Protection	Auto-Reset
	Packet Length	10KB		Reverse Polarity	Protected
	MAC Address Table	8K	MECHANICAL	Dimensions	95mm x 70mm x 29mm
	Switch Fabric	10Gbps/ non-blocking		Weight	0.25kg
	Exchange Property	Backplane Bandwidth: 20Gbps Packet Forwarding Rate: 14.88Mbps		Casing	Aluminium
				Mounting	DIN Rail & Wall Mount
			INDICATORS	PWR	Power
				L/A	Link/ Activity
				PoE	PoE Status
INTERFACE	Wired	4 x 10/100/1000T PoE+ RJ45 1 x 10/100/1000T RJ45	CERTIFICATION	Electrical Safety	EN 62368-1:2020+A11:2020
				Emissions	EN 55032:2015+A1:2020
PoE	Standard	IEEE 802.3af / 802.3at		Radiated Immunity	EN 55035:2017+A11:2020
	Port	RJ45		Harmonic Emissions	EN 61000-3-2:2014
	Power Pin Assignment	4/5 (+) 7/8 (-)		Fluctuations and Flicker	EN 61000-3-3:2013
	PoE Budget	48VDC Supply: 120W 24VDC Supply: 90W 12VDC Supply: 60W		Electro-Static Discharge	EN 61000-4-2:2009
				Electromagnetic Field Immunity	EN 61000-4-3:2010
				Electrical Fast Transients	EN 61000-4-4:2012
				Surge	EN 61000-4-5:2014+A1:2017
				Conducted Immunity	EN 61000-4-6:2014
ENVIRONMENTAL	Operating Temp	-40°C to +80°C		Power Frequency Magnetic Field	EN 61000-4-8:2010
	Storage Temp	-40°C to +85°C			
	Relative Humidity	5% - 95% - non-condensing		RoHS	IEC 63000:2018
	MTBF	>200,000 hours			

Dimensions

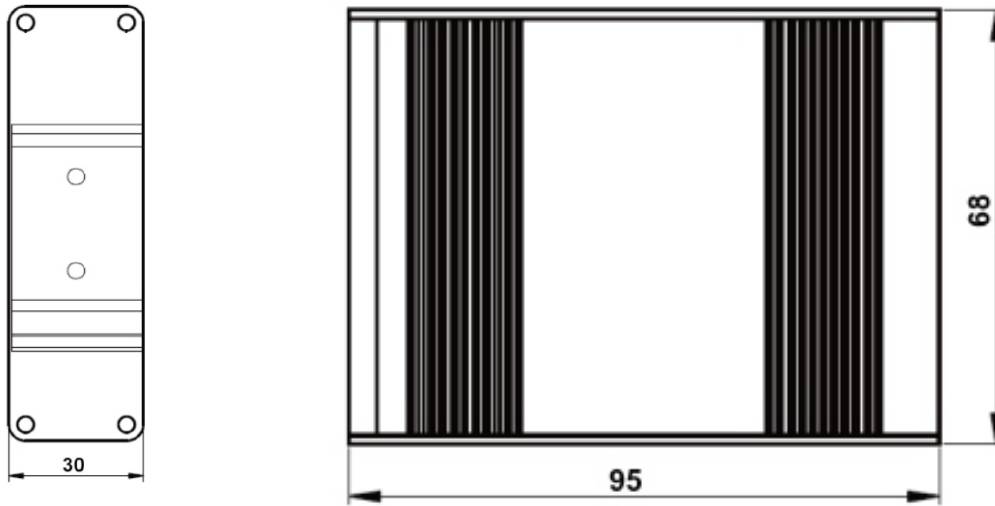


All Dimensions in mm

Ordering Information

Model	Description	Part No
PDT-NSU-7005-MP-I	4 Port 10/100/1000 BASE-T PoE + 1 Port 10/100/1000 BASE-T Unmanaged SFF Industrial Switch, 12-48VDC	0010-00039

Specifications And Availability Are Subject To Change Without Notice. Trademarks Are The Property Of Their Respective Owners.
Copyright © 2022 Parallax Digital Technologies Ltd. All Rights Reserved.



Parallax Digital Technologies Ltd
Unit 19 Endeavour Park, Baker Road
Nelson Park West, Cramlington
Northumberland, NE23 1XA



+44 (0)1670 202001



sales@parallaxdigital.co.uk

www.parallaxdigital.co.uk