


Operations Manual



PDT-NSU-7104-SF-I

Revision 2.0 – March 2023

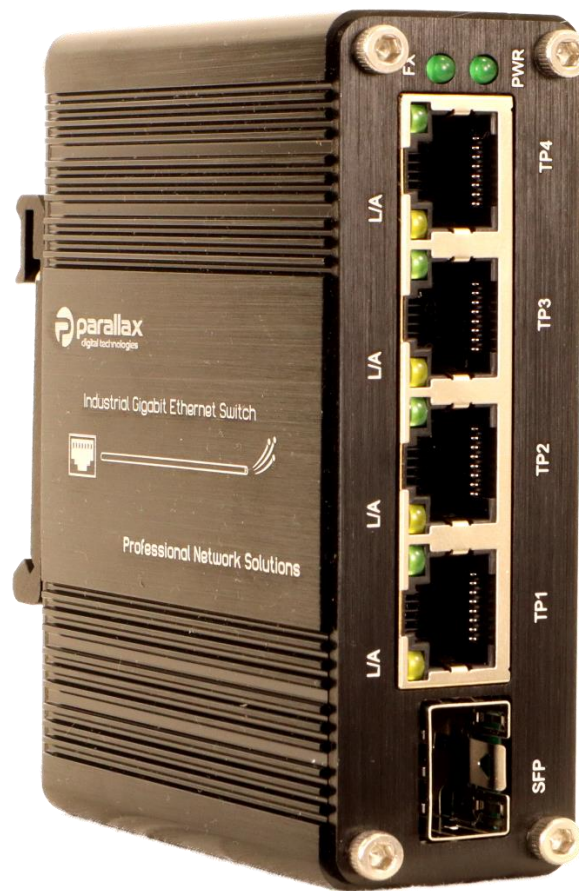

Parallax Digital Technologies Ltd
Unit 19 Endeavour Park, Baker Road
Nelson Park West, Cramlington
Northumberland, NE23 1XA



+44 (0)1670 202001



sales@parallaxdigital.co.uk

www.parallaxdigital.co.uk

Table of Contents

1.	Revision History	2
2.	Abbreviations.....	3
3.	Safety Information.....	4
3.1	General Safety Information	4
3.2	DC Power Supply	4
3.3	Fibre-Optic Ports.....	4
4.	Packing List	5
5.	Product Overview	6
6.	Connectors and Indicators.....	7
6.1	LED Indicators	7
6.2	RJ45 Ports	8
6.3	Power Connections.....	8
7.	Installation Procedures.....	9
7.1	DIN Rail Installation	9
7.2	Wall Mount Installation.....	9
8.	Connection and Setup	10
8.1	Inspection Checks	10
8.2	RJ45 Connections.....	10
8.3	SFP Port Connections.....	10
8.4	Power Up	10
9.	Physical Dimensions	11
10.	Hardware Specification	12

2. Abbreviations

Abbreviation	Description
AP	Access Point
CCA	Copper Clad Aluminium
DC	Direct Current
IEEE	Institute of Electrical and Electronic Engineers
IP	Internet Protocol
MTBF	Mean Time Between Failures
PD	Power Device
PoE	Power over Ethernet
PSU	Power Supply Unit

3. Safety Information

3.1 General Safety Information

WARNING

Only trained and authorised personnel should be permitted to work on this equipment. It is assumed that those using this guide are competent to work on equipment of this nature and will take appropriate precautions when working with the fault analysis guide.

All devices should be inspected upon receipt for signs of physical damage, which may in turn, affect operational performance, or the overall safety of the unit. Any damaged items should be returned to Parallax Digital Technologies Ltd for safety checks.

Parallax Digital Technologies accepts no responsibility for any injury or loss caused by unsafe or inadequate working practices, or for work carried out by an unauthorised third party.

To prevent possible danger, damage, and bodily harm when handling the equipment, please observe all warnings, cautions notices contained in this section. Failure to heed the following danger, warnings, and cautionary statements could lead to serious injury or death.

3.2 DC Power Supply

WARNING

The Unit should be mains-fed using a DC Power Supply using an appropriately rated cable assembly, which is protected internally at the power supply device itself. If the device is to be fed from an alternative power source, then the appropriate circuit protection device should be used to ensure that the supply circuit is interrupted, in the event that a fault in the device causes too much current to flow into it, causing an unsafe condition.

3.3 Fibre-Optic Ports

DANGER

This device incorporates Fibre Optic transmission ports – under no circumstance should anyone look directly into these ports, as this may cause temporary or permanent damage to the user's eyes.

4. Packing List

The following items are included in the shipping carton:

- 1 x PDT-NSU-7104-SF-I Unmanaged Ethernet Switch
- 1 x DIN Rail Mounting Kit (Fitted)
- 1 x Wall Mounting Kit
- Operation & Maintenance Manual (May be electronically supplied)
- Declaration of Conformity (May be electronically supplied)


5. Product Overview

The PDT-NSU-7104-SF-I is a Small Form Factor Industrial Unmanaged Network Switch, supporting 4 x 10/100/1000 BASE-T RJ45 Ports, and 1 x 100/1000 BASE-FX SFP Port.

This model can operate on input voltages from +12-48VDC.


The device is designed for use in harsh industrial environments, and incorporating a rugged aluminium housing, it can be operated across a wide temperature range (-40°C to +80°C) making it suitable for most conditions.

A typical application setup can be seen in the following diagram:

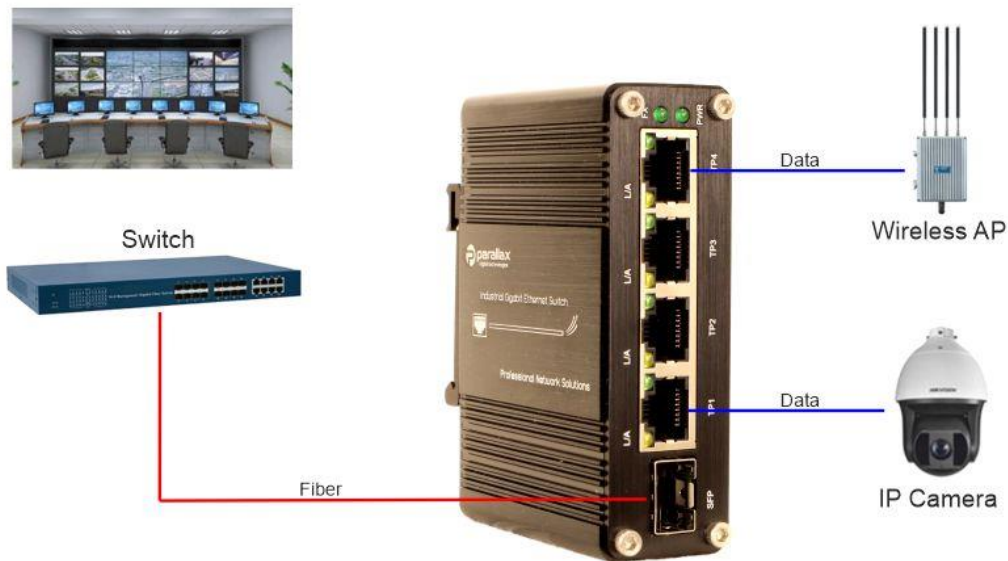

6. Connectors and Indicators

Front Panel

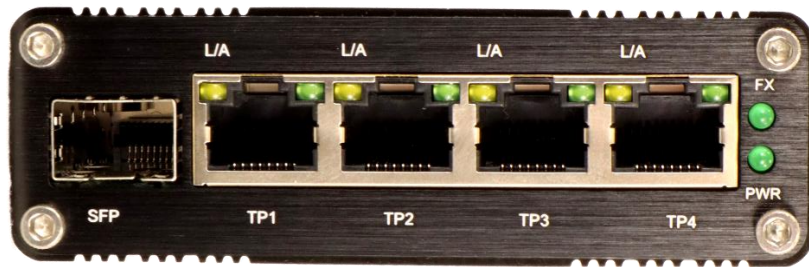

6.1 LED Indicators


The Front Panel LEDs display the status of the switch and the associated port connections as indicated in the table below:

LED	Name	Colour	State	Status
PWR	Power Source	Green	OFF	Power Not Avail
			ON	Power Available
FX	Fiber Link	Green	ON	SFP Connected
			OFF	SFP Not Connected
L/A	Link Activity	Yellow	OFF	Not Running
			ON	Running
Port LEDs	Port Connection	Green	OFF	No Connection
			ON	Port Connected

6.2 RJ45 Ports

The Front Panel has 16 RJ45 Ports and which are all 10/100 BASE-T Ports – note that these are not PoE capable ports. All of the RJ-45 ports are auto MDI/MDI-X compatible and can operate in Full/Half Duplex Modes via auto-negotiation. The remaining 4 ports are 100/1000 BASE-FX SFP Ports and accept a range of SFP modules.


6.3 Power Connections

Model	V-	V+	Power Input
PDT-NSU-7104-MP-SF-I	GND	12-48VDC	


Note: All Power Supplies should provide over-current and short-circuit protection and should have a capacity rating to meet the required output current for the device.

7. Installation Procedures

7.1 DIN Rail Installation

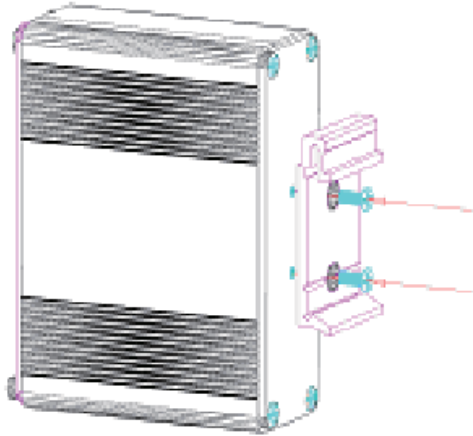


Attach the DIN Rail Bracket (if not fitted) to the switch case using the screws supplied

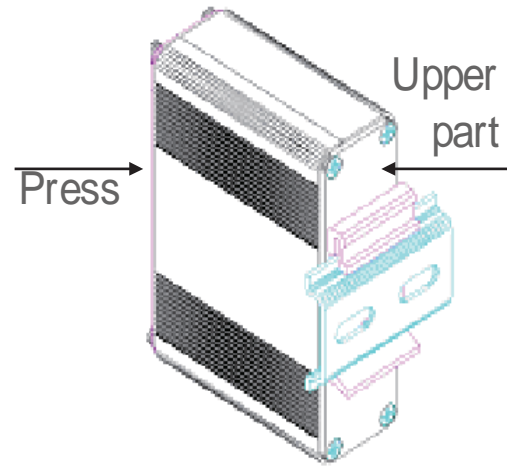


Clip the upper edge of the bracket onto the DIN Rail and push to latch the bottom strip

7.2 Wall Mount Installation

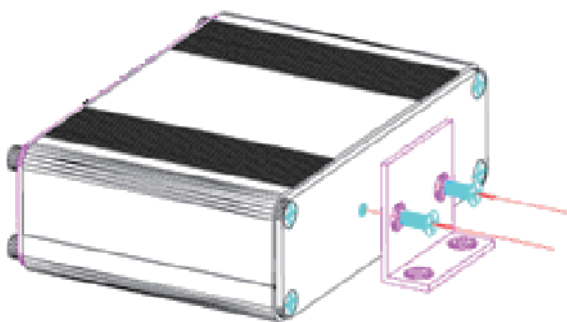

Attach the Wall Mount Bracket (if not fitted) to the switch case using the screws supplied

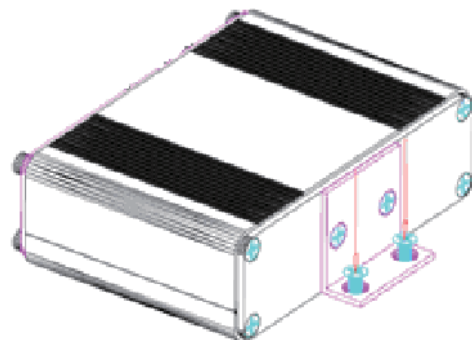

Mount the switch to the required surface using appropriate fixings

8. Connection and Setup

8.1 Inspection Checks

Please inspect the unit to ensure that there is no damage to the external casing which could cause a malfunction of the device or cause a safety critical fault. Any damaged units should be returned to Parallax Digital Technologies for inspection and testing.

Please ensure that the DC Cables are securely fastened in the terminal block, and that the terminal block is correctly inserted into the switch power connector housing.

8.2 RJ45 Connections

Ensure all required RJ45 Ports are connected correctly using CAT5e cable or better to the client devices. The Uplink port should be connected to the host device or network, and the access ports TP1-4 are available for other devices or connections. All cables should be solid copper and not CCA.



8.3 SFP Port Connections

Ensure that the SFP socket is clear from any dirt or contamination and that any required SFP Modules are installed into the unit before applying power and care should be taken not to look directly into any open port once power is applied. It is recommended to leave port blanks fitted when not in use. Only compatible SFP modules should be installed in the unit and the maximum data throughput for ports the optical port is 1000Mbps.

8.4 Power Up

The Unit will automatically power up as soon as DC power is applied to the device. All LEDs will flash briefly to complete the initialization sequence, then the Power LEDs- will be illuminate. Following this, the Port Status LEDs and the Fiber indicator will display the current state of each of the ports.

9. Physical Dimensions

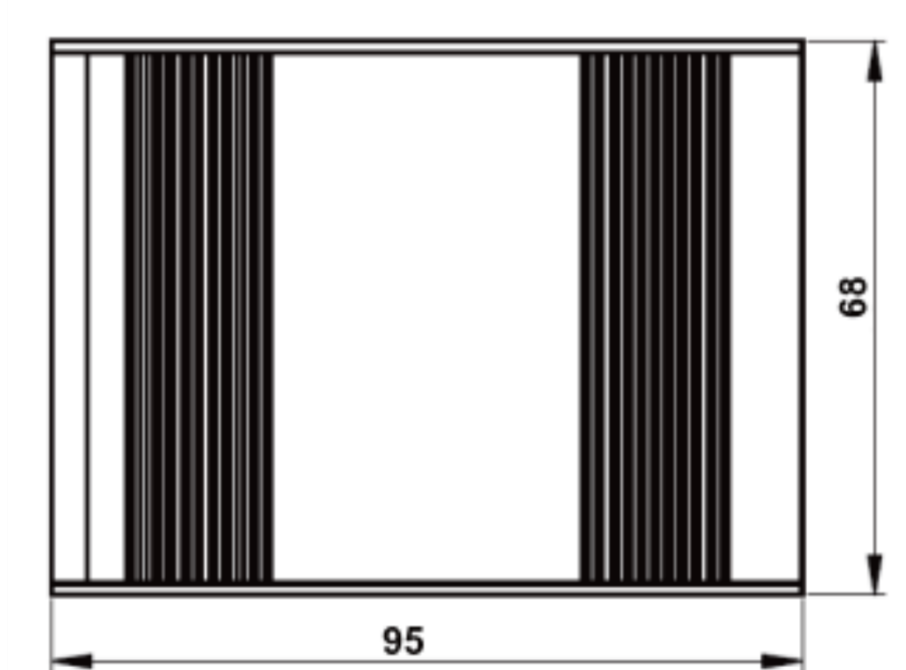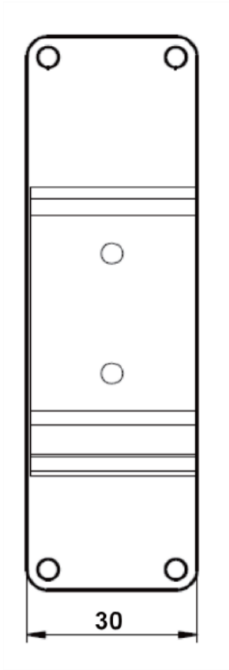

All Dimensions in mm

10. Hardware Specification

ETHERNET

Standards	IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3x Full Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet
Forwarding and Filtering Rate	14,880pps (10Mbps) 148,800pps (100Mbps) 1,488,000pps (1000Mbps)
Packet Buffer	1Mbits
Packet Length	10KB
MAC Address Table	2K
Exchange Property	Backplane Bandwidth 20Gbps Packet Forwarding Rate 14.88Mbps

INTERFACE

Wired	4 x 10/100 BASE-T RJ45
Fiber	1 x 1000 BASE-FX SFP

ENVIRONMENTAL

Operating Temperature	-40°C to +80°C
Storage Temperature	-40°C to +85°C
Relative Humidity	5% - 95% non-condensing
MTBF	>200,000 hours

ELECTRICAL

Operating Voltage	12-48VDC (Terminal Block Connector)
Power Consumption	6W
Short-Circuit Protection	Auto-Reset
Reverse Polarity	Protected

MECHANICAL

Dimensions	95mm x 70mm x 29mm
Weight	250g
Casing	Aluminium
Mounting	DIN Rail & Wall Mount

INDICATORS

PWR	Power Status
FX	Fiber Port Status
L/A	Link Activity
SPD	Link Speed

CERTIFICATION

Electrical Safety	EN 62368-1:2020+A11:2020
Emissions	EN 55032:2015+A1:2020
Radiated Immunity	EN 55035:2017+A1:2020
Harmonic Emissions	EN 61000-3-2:2014
Fluctuations and Flicker	EN 61000-3-3:2013
Electro-Static Discharge	EN 61000-4-2:2009
Electromagnetic Field Immunity	EN 61000-4-3:2010
Electrical Fast-Transients	EN 61000-4-4:2012
Surge	EN 61000-4-5:2014+A1:2017
Conducted Immunity	EN 61000-4-6:2014
Power Frequency Magnetic Field	EN 61000-4-8:2010
RoHS	IEC 63000:2018

For all technical enquiries regarding this product, please contact our technical support team using the following email address:

support@parallaxdigital.co.uk