

Operations Manual



PDT-NSU-7008-MP-I

Revision 1.0 – August 2022



Parallax Digital Technologies Ltd
Unit 19 Endeavour Park, Baker Road
Nelson Park West, Cramlington
Northumberland, NE23 1XA



+44 (0)1670 202001



sales@parallaxdigital.co.uk

www.parallaxdigital.co.uk

Table of Contents

1.	Revision History	2
2.	Abbreviations.....	3
3.	Safety Information.....	4
3.1	General Safety Information	4
3.2	DC Power Supply	4
4.	Packing List	4
5.	Product Overview	5
6.	Connectors and Indicators.....	6
6.1	LED Indicators	6
6.2	RJ45 Ports	6
6.3	Power Supply Connector	7
6.4	PoE Compatibility	7
6.5	PoE Power Budget	7
7.	Installation Procedures.....	8
7.1	DIN Rail Installation	8
7.2	Wall Mount Installation.....	8
8.	Connection and Setup	9
8.1	Inspection Checks	9
8.2	RJ45 Connections.....	9
8.3	Power Up	9
9.	Physical Dimensions	9
10.	Hardware Specification	10

2. Abbreviations

Abbreviation	Description
AP	Access Point
CCA	Copper Clad Aluminium
DC	Direct Current
IEEE	Institute of Electrical and Electronic Engineers
IP	Internet Protocol
MTBF	Mean Time Between Failures
PD	Power Device
PoE	Power over Ethernet
PSU	Power Supply Unit

3. Safety Information

3.1 General Safety Information

WARNING

Only trained and authorised personnel should be permitted to work on this equipment. It is assumed that those using this guide are competent to work on equipment of this nature and will take appropriate precautions when working with the fault analysis guide.

All devices should be inspected upon receipt for signs of physical damage, which may in turn, affect operational performance, or the overall safety of the unit. Any damaged items should be returned to Parallax Digital Technologies Ltd for safety checks.

Parallax Digital Technologies accepts no responsibility for any injury or loss caused by unsafe or inadequate working practices, or for work carried out by an unauthorised third party.

To prevent possible danger, damage, and bodily harm when handling the equipment, please observe all warnings, cautions notices contained in this section. Failure to heed the following danger, warnings, and cautionary statements could lead to serious injury or death.

3.2 DC Power Supply

WARNING

The Unit should be mains-fed using a DC Power Supply using an appropriately rated cable assembly, which is protected internally at the power supply device itself. If the device is to be fed from an alternative power source, then the appropriate circuit protection device should be used to ensure that the supply circuit is interrupted, in the event that a fault in the device causes too much current to flow into it, causing an unsafe condition.

4. Packing List

The following items are included in the shipping carton:

- 1 x PDT-NSU-0008-MP-I Unmanaged Ethernet Switch
- 1 x DIN Rail Mounting Kit (Fitted)
- 1 x Wall Mounting Kit
- Operation & Maintenance Manual (May be electronically supplied)
- Declaration of Conformity (May be electronically supplied)

5. Product Overview

The PDT-NSU-0008-MP-I is an Unmanaged Ethernet PoE+ switch, providing 8 x 10/100 PoE+ RJ45 for connectivity, designed to directly connect to devices such as IP Cameras, Wireless APs, IP Telephones etc.

This model operates from a nominal +48VDC power supply but can utilize supplies in the range +48-57VDC.

The device is designed for use in harsh industrial environments, and incorporating a rugged aluminium housing, it can be operated across a wide temperature range (-40°C to +80°C) making it suitable for most conditions.

A typical application setup can be seen in the following diagram:



6. Connectors and Indicators

Front Panel



6.1 LED Indicators

The Front Panel LEDs display the status of the switch and the associated port connections as indicated in the table below:


LED	Name	Colour	State	Status
PWR	Power	Green	OFF	Unit Power Off
			ON	Unit Power On
T1-8	Link Activity	Green	OFF	No Connection
			Flashing	Connection
FX1/2	Not Used	Green	N/A	N/A

6.2 RJ45 Ports

The Front Panel has 8 RJ45 Ports and all are PoE+ compatible, with each port capable of supplying 30W each.

6.3 Power Supply Connector

The device is designed to be supplied by a +48VDC power supply, but can operate in the range +48-57VDC. Power is supplied via a 6-pin terminal block connector with the following pinout

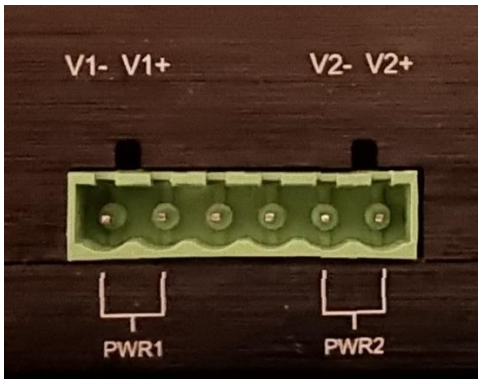

Pin	Group	Input
1	PWR 1	GND
2		+48-57VDC
3	N/A	NC
4		NC
5	PWR 2	GND
6		+48-57VDC

Note: All Power Supplies should provide over-current and short-circuit protection, and should have a capacity rating to meet the required output current for the device plus any PoE powered device requirements

6.4 PoE Compatibility

Model No	IEEE 802.3af	IEEE 802.3at	IEEE 802.3bt
PDT-NSU-0008-MP-I	●	●	


The PoE output for this model is compatible with PoE and PoE+ Standards, as can be seen in the table above.

6.5 PoE Power Budget


The PoE Power Budget for this unit is 240W and it is advised to connect PWR 1 and PWR 2 to separate supplies if power supply redundancy is required

7. Installation Procedures

7.1 DIN Rail Installation

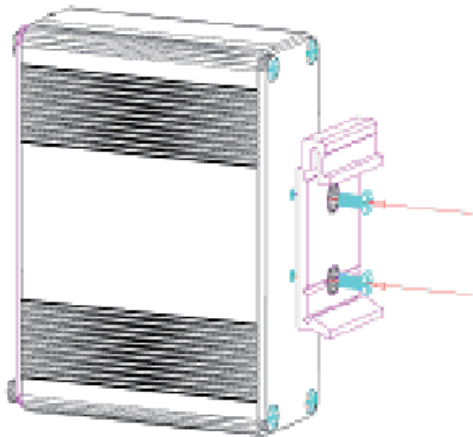


Attach the DIN Rail Bracket (if not fitted) to the switch case using the screws supplied

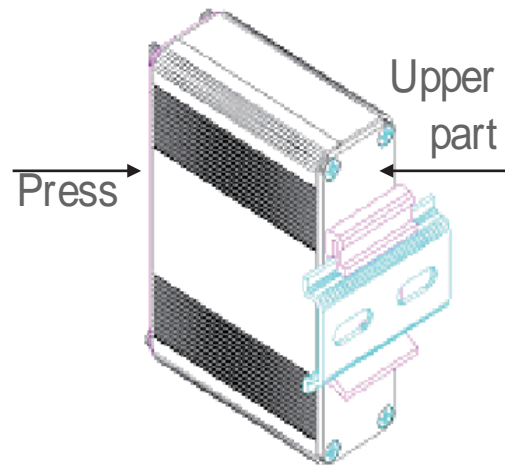


Clip the upper edge of the bracket onto the DIN Rail and push to latch the bottom strip

7.2 Wall Mount Installation

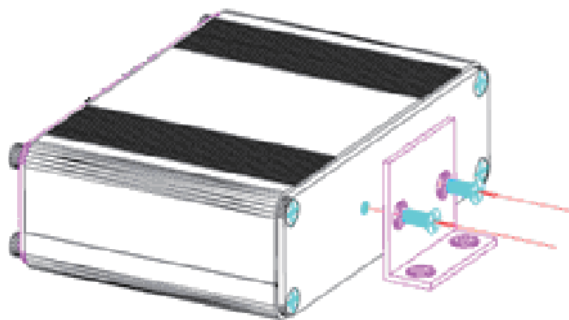

Attach the Wall Mount Bracket (if not fitted) to the switch case using the screws supplied

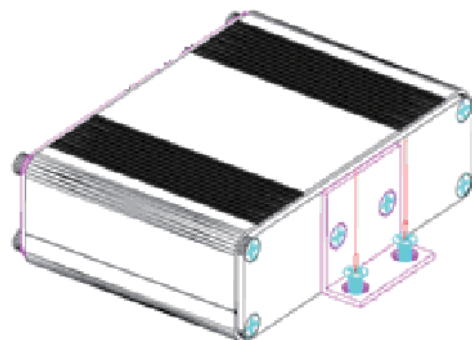

Mount the switch to the required surface using appropriate fixings

8. Connection and Setup

8.1 Inspection Checks

Please inspect the unit to ensure that there is no damage to the external casing which could cause a malfunction of the device or cause a safety critical fault. Any damaged units should be returned to Parallax Digital Technologies for inspection and testing.

Please ensure that the DC Cables are securely fastened in the terminal block, and that the terminal block is correctly inserted into the switch power connector housing.


8.2 RJ45 Connections

Ensure all required RJ45 Ports are connected correctly using CAT5e cable or better to the client devices. The Uplink port should be connected to the host device or network, and the access ports are available for other devices or connections. All cables should be solid copper and not CCA.

8.3 Power Up

The Unit will automatically power up as soon as DC power is applied to the device. The Power Light will be illuminated and after approximately 1 second, all of the other LEDs will flash on and off to complete the initialization sequence. Following this, the Port Status LEDs will display the current state of each of the ports.

9. Physical Dimensions

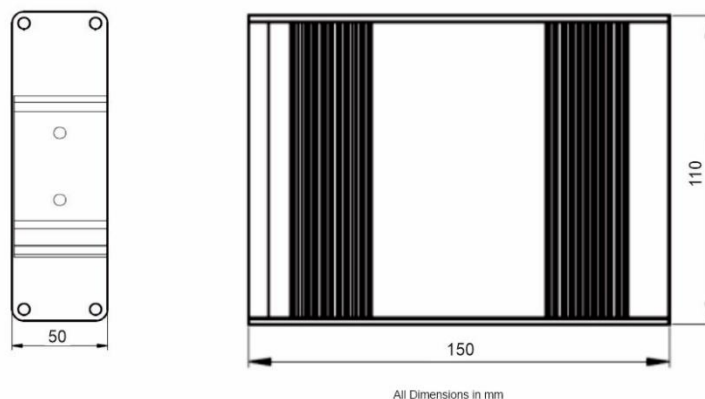

All Dimensions are in mm

10. Hardware Specification

ETHERNET

Standards	IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3x Full Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet Plus
Forwarding and Filtering Rate	14,880pps (10Mbps) 148,800pps (100Mbps) 1,488,000pps (1000Mbps)
Packet Buffer	2Mbits
Packet Length	10KB
MAC Address Table	16K
Exchange Property	Backplane Bandwidth 20Gbps Packet Forwarding Rate 14.88Mbps

INTERFACE

Wired	8 x 10/100/1000 PoE+ RJ45
PoE	
Standard Port	IEEE 802.3af/ 802.3at RJ45
Power Pin Assignment	4/5 (+) 7/8 (-)
PoE Budget	240W

ENVIRONMENTAL

Operating Temperature	-40°C to +80°C
Storage Temperature	-40°C to +85°C
Relative Humidity	5% - 95% non-condensing
MTBF	200,000 hours

ELECTRICAL

Operating Voltage	+48-57VDC (Terminal Block Connector)
Power Consumption	5W Without PoE Load – 245W with Max PoE
Short-Circuit Protection	Auto-Reset
Reverse Polarity	Protected

MECHANICAL

Dimensions	150mm x 110mm x 50mm
Weight	0.6 kg
Casing	Aluminium
Mounting	DIN Rail & Wall Mount

INDICATORS

PWR	Power
T1-8	Link/Activity
FX1/2	Not Used

CERTIFICATION

Electrical Safety	EN 62368-1:2020+A11:2020
Emissions	EN 55032:2015+A1:2020
Radiated Immunity	EN 55035:2017+A1:2020
Harmonic Emissions	EN 61000-3-2:2014
Fluctuations and Flicker	EN 61000-3-3:2013
Electro-Static Discharge	EN 61000-4-2:2009
Electromagnetic Field Immunity	EN 61000-4-3:2010
Electrical Fast-Transients	EN 61000-4-4:2012
Surge	EN 61000-4-5:2014+A1:2017
Conducted Immunity	EN 61000-4-6:2014
Power Frequency Magnetic Field	EN 61000-4-8:2010
RoHS	IEC 63000:2018

For all technical enquiries regarding this product, please contact our technical support team using the following email address:

support@parallaxdigital.co.uk