

Power over Ethernet










- Compliant with IEEE 802.3af/at
- 2.5kV Isolation
- Power Input: 48VDC via PoE
- Power Output: +24VDC
- 1.0A Output Current Rating
- 2.1mm/ 5.5mm Female DC Jack
 Power Output Connector
- 10/100MbpsTransmission Speeds

Overview:

The PDT-SPL-2401-100-J is a Power over Ethernet (PoE) Splitter designed to meet the needs of many portable or small form factor devices. It extracts the Power from the PoE Cat5/6/7 cable and provides it to an end-device as a discrete +24VDC output, via a standard 2.1mm/5.5mm Female DC Jack Socket. The remaining data portion of the signal is made available via an RJ 45 output connector. The device supports the use of PSE equipment which meet the IEEE802.3af standard, such as PoE Switches or certified PoE Injectors. This device is perfect for small form factor computers, tablets, IoT gateways and many more applications.

Applications

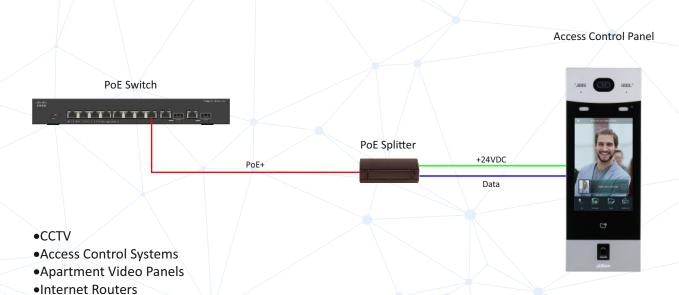



Specifications And Availability Are Subject To Change Without Notice. Trademarks Are The Property Of Their Respective Owners.

Copyright © 2022 Parallax Digital Technologies Ltd. All Rights Reserved.



Cellular Gateways











Specifications

ELECTRICAL

ETHERNET Standards IEEE 802.3i Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet Plus **INTERFACE** Wired Input 1 x RJ45 Data Output 1 x RJ45 1 x 2.1mm/5.5mm DC Jack Socket Power Output PoE Standard IEEE 802.3af/at RJ45 4/5 (+) 7/8 (-) Port Power Pin Assignment 24W Max (1.0A) PoE Budget

Operating Voltage

44-57VDC via PoE

Operating Temp Storage Temp Working Humidity Storage Humidity **ENVIRONMENTAL** 0°C to +55°C -20°C to +75°C 10% - 90% - non-condensing 5% - 90% - non-condensing MECHANICAL 83mm x 28mm x 22mm Dimensions Weight **INDICATORS** PoE Power in Green - Steady PoE Power Out Amber - Steady CERTIFICATION **Electrical Safety** EN 62368-1:2020+A11:2020 EN 55032:2015+A1:2020 EN 55035:2017+A11:2020 **Emissions** Radiated Immunity EN 61000-3-2:2014 Harmonic Emissions Fluctuations and Flicker EN 61000-3-3:2013 Electro-Static Discharge Electromagnetic Field Immunity Electrical Fast Transients EN 61000-4-2:2009 EN 61000-4-3:2010 EN 61000-4-4:2012 RoHS IEC 63000:2018

Ordering Information

Model	Description	Part No
PDT-SPL-2401-100-J	10/100M24V 1A PoE Splitter2.1mm/5.5mm DC Jack Socket	0014-00007





Northumberland, NE23 1XA



Specifications And Availability Are Subject To Change Without Notice. Trademarks Are The Property Of Their Respective Owners.

Copyright © 2022 Parallax Digital Technologies Ltd. All Rights Reserved.



